SC-2215SLB

FEATURES

- ✓ **2-Way screen channel**
- ✓ **Seamless transitions between acoustic sections**
- ✓ **2 x 15" woofers, 1.4" diaphragm compression driver**
- ✓ **Asymmetric vertical coverage (+20°/-30°)**

Designed for large cinema requirements, the **SC-2215SLB** (Bi-amp) delivers clear and articulate dialog . The use of a specific 15" voice coil allows better heat transfer and significant reduction in harmonic distortion.

As members of the Studio serie, those high performance solutions offer powerful, smooth and accurate reproduction of cinema soundtracks.

SPECIFICATIONS

	SC-2215SLB	
HARDWARE		
Frequency range (-10dB)[1]	34.5 Hz - 18 kHz	
Continuous AES Power[2]	LF HF	800 W 160 W
Continuous Program Power[3]	LF HF	1200 W 320 W
Sensitivity (1w/1m)[4]	LF HF	104 dB 108 dB
Rated Maximum SPL (1m)	LF HF	133 dB 130 dB
Crossover frequency	800 Hz, 24dB/oct.	
Rated impedance	LF HF	4 Ω 8 Ω
Horiz. Coverage Angle (-6dB)	90°	
Vert. Coverage Angle (-6dB)	50°	
ENCLOSURE DETAILS		
Dimensions (HxWxD)	1579 mm x 750 mm x 450 mm	
Net Weight	78.0 kg	

[1]Free field, -10dB from on-axis sensitivity
[2]AES continuous pink noise, 2 hours duration.
[3]Continuous program power is defined as 3 dB greater than AES continuous pink noise and is a conservative expression of the transducer's ability to handle normal music program material.
[4]Average measured free field , 2.83V, 1m for 8 Ω and 2.00V, 1m for 4 Ω

TECHNICAL DRAWING

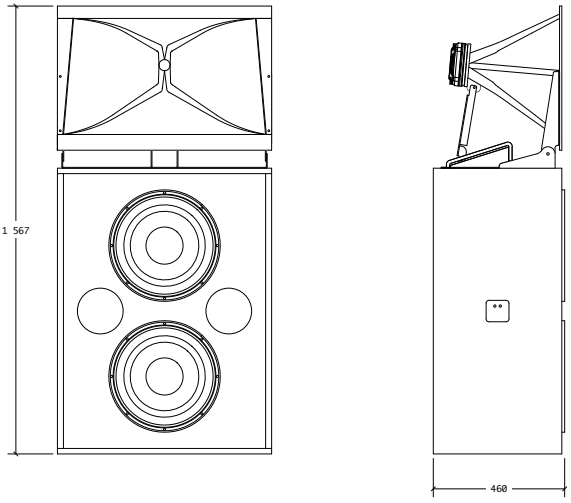



As part of ADDE's ongoing commitment to product development, specifications are subject to change without notice.

21, Impasse Frédéric Faÿs - 69100 VILLEURBANNE - FRANCE
Phone: +33 (0)4 37 43 19 70 - Fax: +33 (0)4 37 43 19 71 Email : enquiry@adde.fr www.adde-audio.fr