SC-2115CSP
SC-2115CSB

FEATURES

- ✓ **Cost effective system for small size theatre**
- ✓ **2-Way passive or bi-amplified**
- ✓ **15" woofer with 1.4" diaphragm compression driver**
- ✓ **Design shallow in depth**

Designed for smaller cinema requirements, the **SC-2115CSP** (passive) or **SC-2115CSB** (bi-amplified) considerably reduces space requirements behind the screen.
The passive crossover developed provides clear and articulate dialog with uniform acoustic power output.

As member of the Classic series, this cost effective solution offers reliability, quality and easy installation.

SPECIFICATIONS	SC-2115CSP	SC-2115CSB
HARDWARE		
Frequency range (-10dB)[1]	40 Hz - 18 kHz	
Continuous AES Power[2]	350 W	LF 350 W HF 100 W
Continuous Program Power[3]	500 W	LF 500 W HF 200 W
Sensitivity (1w/1m)[4]	98 dB SPL	LF 98 dB HF 109 dB
Rated Maximum SPL (1m)	121 dB	LF 123 dB HF 129 dB
Crossover frequency	800 Hz	800 Hz 24dB/oct.
Rated impedance	8 Ω	LF 8 Ω HF 8 Ω
Horiz. Coverage Angle (-6dB)	90°	
Vert. Coverage Angle (-6dB)	60°	
ENCLOSURE DETAILS		
Dimensions (HxWxD)	1095 mm x 750 mm x 260 mm	
Net Weight	33 kg	

[1]Free field, -10dB from on-axis sensitivity
[2]AES continuous pink noise, 2 hours duration.
[3]Continuous program power is defined as 3 dB greater than AES continuous pink noise and is a conservative expression of the transducer's ability to handle normal music program material.
[4]Average measured free field , 2.83V, 1m

TECHNICAL DRAWING

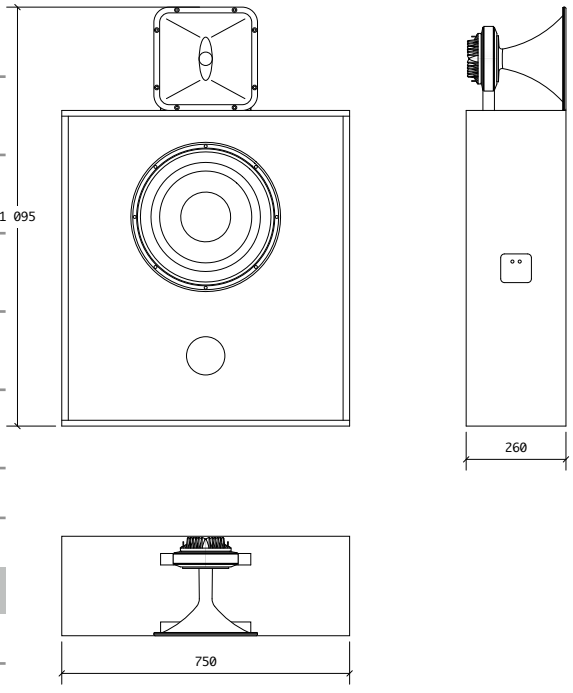

21, Impasse Frédéric Faÿs - 69100 VILLEURBANNE - FRANCE
Phone: +33 (0)4 37 43 19 70 - Fax: +33 (0)4 37 43 19 71 Email : enquiry@adde.fr www.adde-audio.fr