SC-2215CXLB

FEATURES

- ✓ **Cost effective system for large and very large size theatre**
- ✓ **2-Way bi-amplified version**
- ✓ **2 x 15" woofers with 1.4" diaphragm compression driver**
- ✓ **Maximum power handling**
- ✓ **Optimum coverage areas for very large auditorium**

Designed for large and very large cinema requirements, the **SC-2215CXLB** (bi-amplified) delivers powerful, smooth and accurate reproduction of cinema soundtracks.

As members of the Classic series, this cost effective solution offers reliability, quality and easy installation.

SPECIFICATIONS

		SC-2215CXLB
HARDWARE		
Frequency range (-10dB)[1]		40 Hz - 18 kHz
Continuous AES Power[2]	LF HF	700 W 100 W
Continuous Program Power[3]	LF HF	1000 W 200 W
Sensitivity (1w/1m)[4]	LF HF	99 dB 109 dB
Rated Maximum SPL (1m)	LF HF	129 dB 129 dB
Crossover frequency		800 Hz, 24 dB/oct.
Rated impedance	LF HF	4 Ω 8 Ω
Horiz. Coverage Angle (-6dB)		90°
Vert. Coverage Angle (-6dB)		40°
ENCLOSURE DETAILS		
Dimensions (HxWxD)		1490 mm x 750 mm x 450 mm
Net Weight		64 kg

[1]Free field, -10dB from on-axis sensitivity
[2]AES continuous pink noise, 2 hours duration.
[3]Continuous program power is defined as 3 dB greater than AES continuous pink noise and is a conservative expression of the transducer's ability to handle normal music program material.
[4]Average measured free field , 2.83V, 1m for 8 Ω and 2.00V, 1m for 4 Ω

TECHNICAL DRAWING

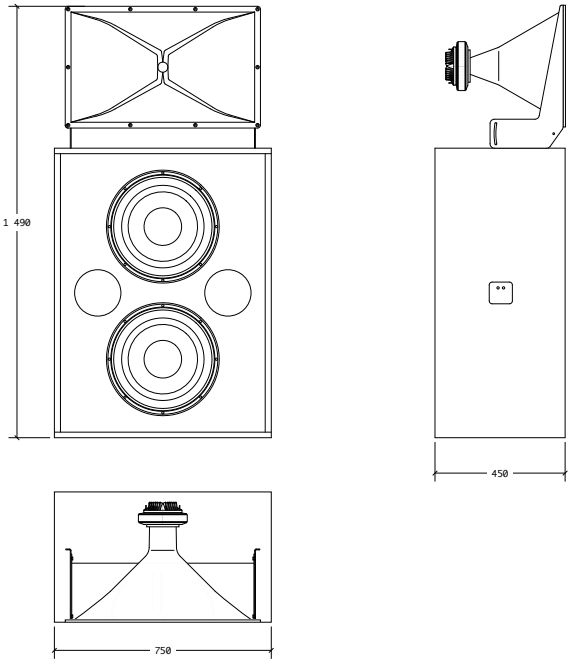

21, Impasse Frédéric Faÿs - 69100 VILLEURBANNE - FRANCE
Phone: +33 (0)4 37 43 19 70 - Fax: +33 (0)4 37 43 19 71 Email : enquiry@adde.fr www.adde-audio.fr