



SW-118BM



FEATURES

- ✓ Designed for small and medium size room
- ✓ Important power handling
- ✓ Extremely low harmonic distortion
- ✓ Extended excursion capability

Developed especially for small and medium sizes cinema theaters, the **SW-118BM** provides sharp and fast extended low frequency.

As members of the Black Edition series, those high performance solutions offer powerful, smooth and accurate reproduction of cinema soundtracks.

SPECIFICATIONS

SW-118BM

HARDWARE

Frequency response (-10dB) ¹	25 Hz
Continuous AES Power ²	1000 W
Continuous Program Power ³	1400 W
Sensitivity (1w/1m) ⁴	95 dB SPL
Rated Maximum SPL (1m)	126 dB
Rated impedance	8 Ω

ENCLOSURE DETAILS

Dimensions (HxWxD)	1170 mm x 750 mm x 550 mm
Net Weight	57 kg


¹Free field, -10dB from on-axis sensitivity

²AES continuous pink noise, 2 hours duration.

³Continuous program power is defined as 3 dB greater than AES continuous pink noise and is a conservative expression of the transducer's ability to handle normal music program material.

⁴Average measured free field, 2.83V, 1m

TECHNICAL DRAWING

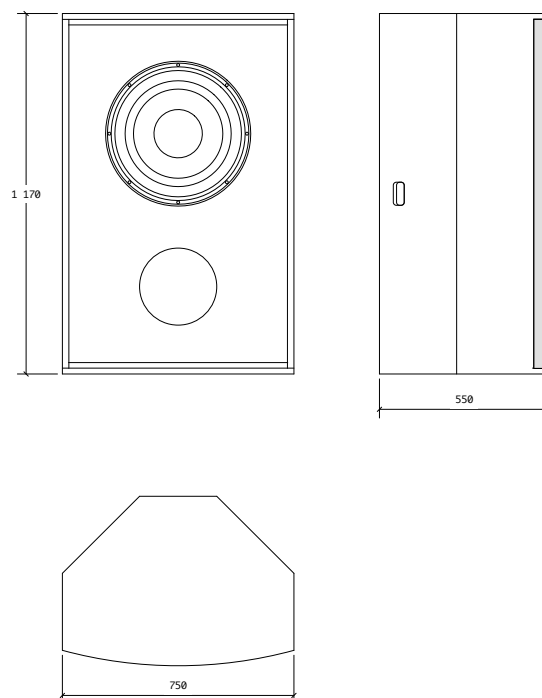

As part of ADDE's ongoing commitment to product development, specifications are subject to change without notice.