



SW-118SS



FEATURES

- ✓ Designed for small size room
- ✓ Important power handling
- ✓ Extremely low harmonic distortion
- ✓ Extended excursion capability

Developped especially for small size cinema theatre, the **SW-118SS** provides sharp and fast extended low frequency.

As members of the Studio serie, this high performance solution offers powerful, smooth and accurate reproduction of cinema

SPECIFICATIONS

SW-118SS

HARDWARE	
Frequency response (-10dB) ¹	32 Hz
Continuous AES Power ²	1000 W
Continuous Program Power ³	2000 W
Sensitivity (1w/1m) ⁴	96 dB SPL
Rated Maximum SPL (1m)	126 dB
Rated impedance	8 Ω
ENCLOSURE DETAILS	
Dimensions (HxWxD)	1000 mm x 750 mm x 350 mm
Net Weight	50 kg


¹Free field, -10dB from on-axis sensitivity

²AES continuous pink noise, 2 hours duration.

³Continuous program power is defined as 3 dB greater than AES continuous pink noise and is a conservative expression of the transducer's ability to handle normal music program material.

⁴Average measured free field , 2.83V, 1m

TECHNICAL DRAWING

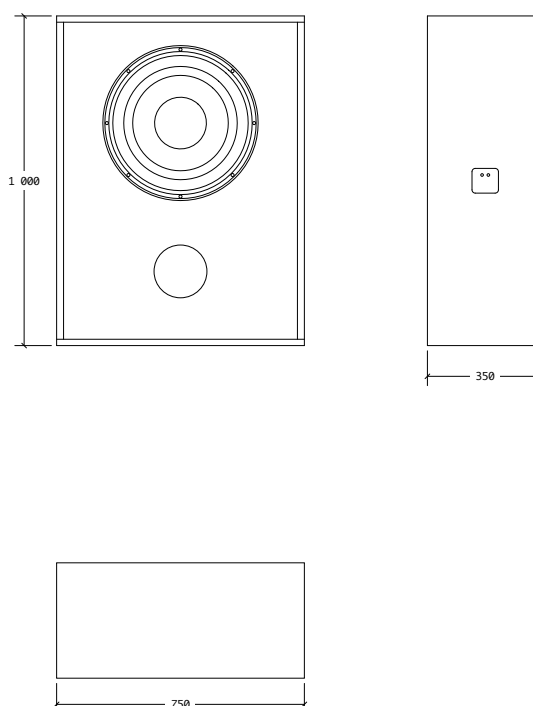

As part of ADDE's ongoing commitment to product development, specifications are subject to change without notice.



21, Impasse Frédéric Faÿs - 69100 VILLEURBANNE - FRANCE

Phone: +33 (0)4 37 43 19 70 - Fax: +33 (0)4 37 43 19 71 Email : enquiry@adde.fr

www.adde-audio.fr