



SW-118SM



FEATURES

- ✓ **Designed for small and medium size room**
- ✓ **High power handling**
- ✓ **Extremely low harmonic distortion**
- ✓ **Extended excursion capability**

Developped especially for small and medium sizes cinema theatres, the **SW-118SM** provides sharp and fast extended low frequency.

As members of the Studio serie, this high performance solution offers powerful, smooth and accurate reproduction of cinema soundtracks.

SPECIFICATIONS

SW-118SM

HARDWARE

Frequency response (-10dB) ¹	25 Hz
Continuous AES Power ²	1000 W
Continuous Program Power ³	2000 W
Sensitivity (1w/1m) ⁴	94 dB SPL
Rated Maximum SPL (1m)	124 dB
Rated impedance	8 Ω

ENCLOSURE DETAILS

Dimensions (HxWxD)	1100 mm x 750 mm x 450 mm
Net Weight	56 kg


¹Free field, -10dB from on-axis sensitivity

²AES continuous pink noise, 2 hours duration.

³Continuous program power is defined as 3 dB greater than AES continuous pink noise and is a conservative expression of the transducer's ability to handle normal music program material.

⁴Average measured free field , 2.83V, 1m

TECHNICAL DRAWING

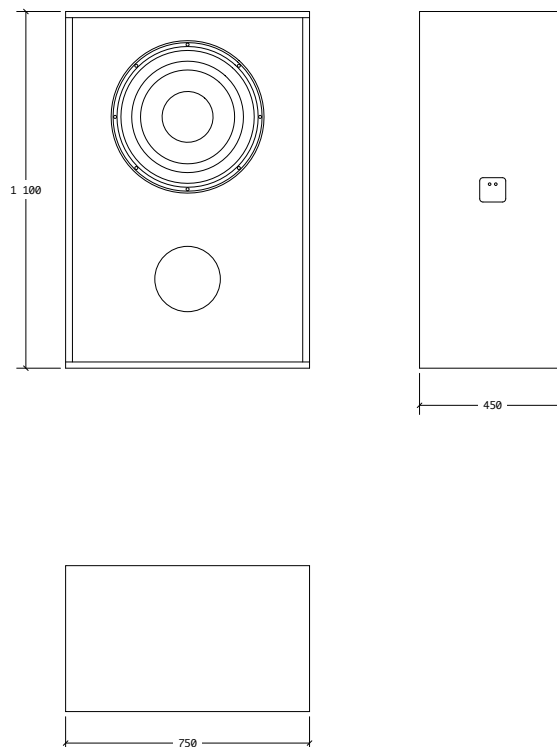

As part of ADDE's ongoing commitment to product development, specifications are subject to change without notice.